


SHANGHAI CIPHY INDUSTRY CO.,LTD.

Marine Valve JIS F3060


MODEL NO: JIS-F3060

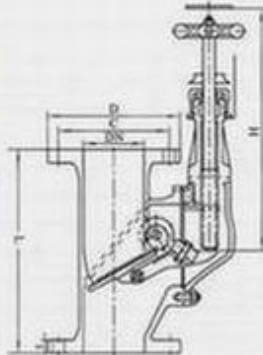

MAIN DATA FOR JOINING(mm)

DN	L	D	C	n-d	t	H	Weight (kg)
50	210	130	105	4-15	14	131	14.7
65	240	155	130	4-15	14	141	21.3
80	260	180	145	4-19	14	155	27.7
100	280	200	165	8-19	16	171	40.8
125	330	235	200	8-19	16	195	57.6
150	360	265	230	8-19	18	212	80.3

Cast Steel Down Storm Valves for Marine JIS F3060 5K

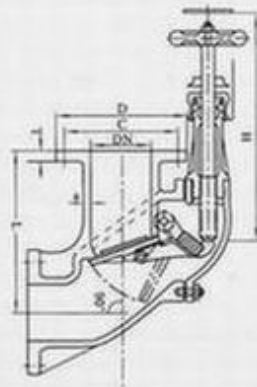

MAIN DATA FOR JOINING(mm)

DN	L	D	C	n-d	t	H	Weight (kg)
50	170	130	105	4-15	14	131	13.0
65	190	155	130	4-15	14	141	19.0
80	220	180	145	4-19	14	155	23.8
100	250	200	165	8-19	16	171	29.6
125	270	235	200	8-19	16	195	50.0
150	340	265	230	8-19	18	212	67.0

Cast Steel Down Storm Valves for Marine JIS F3060R 5K

Applicable scope:

The JIS Down Storm Valve are used for controlling the medium to open and close and preventing refluece in seawater and fleshwater piping. Dimensions of flange are according to JIS B2220 flange dimensions of steel pipe.

Capability:

Nominal Pressure	5kgf/cm ² (0.49Mpa)
Seal Pressure	7.7kgf/cm ² (0.761Mpa)
Intensity Pressure	10.5kgf/cm ² (1.03Mpa)



SHANGHAI CIPHY INDUSTRY CO.,LTD

7G-1 Building, N0.515 Yishan Rd.

Shanghai, China

TEL:+86-21-5497 5962

FAX:+86-21-5497 5963

HTTP://WWW.CIPHY.CN

CIPHY@CIPHY.COM

COPYRIGHT©2004-[CIPHY]

ALL RIGHTS RESERVED.