


SHANGHAI CIPHY INDUSTRY CO.,LTD.

Marine Valve JIS F7311/7312

MODEL NO: JIS- F7311/7312

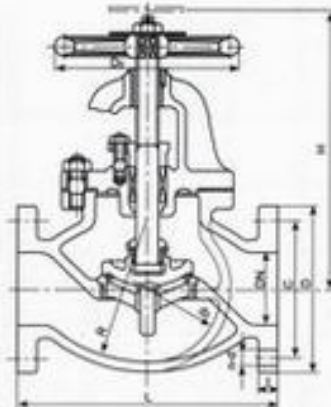


MAIN DATA FOR JOINING(mm)

DN	L	D	C	n-d	t	H	D ₂	d ₂	R	Weight (kg)
50	210	130	105	4-15	16	270	160	110	110	14.7
65	250	155	130	4-15	18	300	180	135	135	21.3
80	280	180	145	4-19	18	310	180	160	160	27.7
100	340	200	165	8-19	20	360	224	195	195	40.8
125	410	235	200	8-19	20	390	250	240	240	57.6
150	480	265	230	8-19	22	445	280	280	280	80.3
200	570	320	280	8-23	24	530	315	365	365	139
250	740	385	345	12-23	26	650	355	460	460	230
300	840	430	390	12-23	28	740	400	560	560	309

Marine Cast Steel Globe Valves JIS F7311 5K

Marine Cast Steel Screw Down Check Globe Valves JIS F7311C 5K

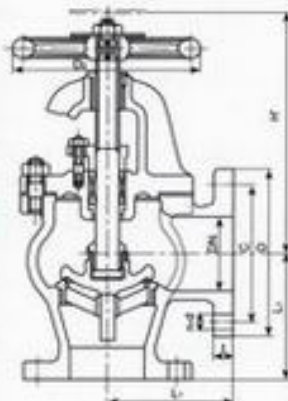

MAIN DATA FOR JOINING(mm)

DN	L ₁	D	C	n-d	t	H	D ₂	Weight (kg)
50	100	130	105	4-15	16	240	160	12.9
65	115	155	130	4-15	18	255	180	18.2
80	130	180	145	4-19	18	265	180	23.4
100	150	200	165	8-19	20	310	224	33.7
125	170	235	200	8-19	20	330	250	46.2
150	190	265	230	8-19	22	380	280	63.4
200	220	320	280	8-23	24	450	315	105
250	275	385	345	12-23	26	540	355	178
300	310	430	390	12-23	28	610	400	275

Marine Cast Steel Angle Valves JIS F7312 5K

Marine Cast Steel Screw Down Check Angle Valves JIS F7312C 5K

Applicable scope

The products are used for controlling the medium to open and close, preventing reflux in fuel oil piping, lubricating oil piping, water piping, gas piping and steam piping at temperatures 205°C or less. Dimensions of flange are according to JIS B2220 flange dimensions of steel pipe.

Capability:

Nominal Pressure	5kgf/cm ² (0.49Mpa)
Seal Pressure	7.7kgf/cm ² (0.761Mpa)
Intensity Pressure	10.5kgf/cm ² (1.03Mpa)

Materials of major parts

Part name	Material	
	Name	Mark
Body, Bonnet	Cast steel	ZG230-450
Disc, Seat	Stainless steel	2cr13
Stem	Stainless steel	2cr13
Packing	Flexible graphite	

Medium	Max Pressure kgf/cm ² (Mpa)
Steam ≤ 205°C	5 (0.49)
Air & gas	
Oil & flow water	7 (0.69)
Lentic water ≤ 120°C	



SHANGHAI CIPHY INDUSTRY CO.,LTD
 7G-1 Building, N0.515 Yishan Rd.
 Shanghai, China
 TEL:+86-21-5497 5962
 FAX:+86-21-5497 5963
 HTTP://WWW.CIPHY.CN
 CIPHY@CIPHY.COM
 COPYRIGHT©2004-[CIPHY]
 ALL RIGHTS RESERVED.