


SHANGHAI CIPHY INDUSTRY CO.,LTD.

Marine Valve JIS F7333


MODEL NO: JIS-F7333

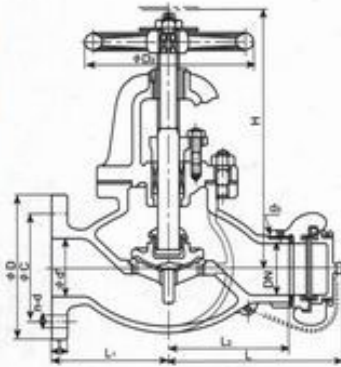

MAIN DATA FOR JOINING(mm)

DN	K	d'	L	D	C	n-d	t	H	D ₂	d ₃	L ₁	L ₂	Weight (kg)
50	5	50	165	130	105	4-15	16	270	160	M64X2	105	110	14.7
	10	50	170	155	120	4-19	20	285	160	M64X2	110	115	18.9
65	10	65	200	175	140	4-19	22	310	200	M80X2	135	140	28.2

Marine Cast Iron Globe Hose Valves JIS F7333 5K

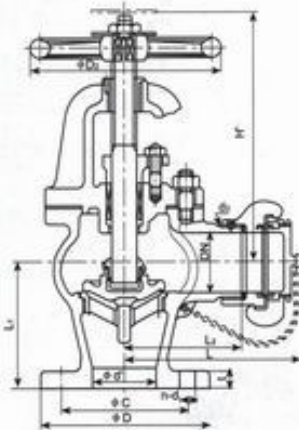

MAIN DATA FOR JOINING(mm)

DN	K	d'	L	D	C	n-d	t	H	D ₂	d ₃	L ₁	L ₂	Weight (kg)
50	5	50	155	130	105	4-15	16	255	160	M64X2	100	110	12.8
	10	50	170	155	120	4-19	20	255	160	M64X2	120	115	17.0
65	10	65	185	175	140	4-19	22	270	200	M80X2	130	125	24.3

Marine Cast Iron Angle Hose Valves JIS F7333 5K/10K

Applicable scope:

The products are used for fire controlling with seawater for shipping. Dimensions of flange are according to JIS B2220 flange dimensions of steel pipe.

Materials of major parts:

Part name	Material			
	Name	Mark (B)	Name	Mark (B)
Body, Bonnet	CI/DI	HT200.QT400-15	CI/DI	HT200.QT400-15
Disc, Seat	Cast bronze	ZCuSn5Pb5Zn5	Stainless steel	2cr13
Stem	Bronze	QA1 9-2	Stainless steel	2cr13
Packing	Flexible graphite		Flexible graphite	

Capability:

Nominal Pressure	5kgf/cm ² (0.49Mpa)	10kgf/cm ² (0.98Mpa)
Seal Pressure	7.7kgf/cm ² (0.76Mpa)	15.4kgf/cm ² (1.51Mpa)
Intensity Pressure	10.5kgf/cm ² (1.03Mpa)	21kgf/cm ² (2.06Mpa)

Medium	Max Pressure kgf/cm ² (Mpa)	
	5k	10k
flow water	5kgf/cm ² (0.49MPa)	10kgf/cm ² (0.98MPa)
Lenitic water ≤ 120°C	7kgf/cm ² (0.69MPa)	14kgf/cm ² (1.37MPa)



SHANGHAI CIPHY INDUSTRY CO.,LTD

7G-1 Building, N0.515 Yishan Rd.

Shanghai, China

TEL:+86-21-5497 5962

FAX:+86-21-5497 5963

HTTP://WWW.CIPHY.CN

CIPHY@CIPHY.COM

COPYRIGHT©2004-[CIPHY]

ALL RIGHTS RESERVED.