


## CAST IRON OR DUCTILE IRON Y-STRAINER

### DESIGN DESCRIPTION:

- Design: Factory STD,;
- Manufacture: Factory STD;
- End To End: Factory STD;
- Thread: NPT, DIN,BSPT/BSP;
- Threaded Cover;
- Y-Strainer;
- Material and Working Temp.:
  - ◆ Cast Iron and Ductile Iron: 0 °C-200 °C(32°F -392°F)
  - ◆ Buna-N: 0 °C-71 °C(160°F) Maximum
  - ◆ EPDM: 0 °C-80 °C(176°F) Maximum

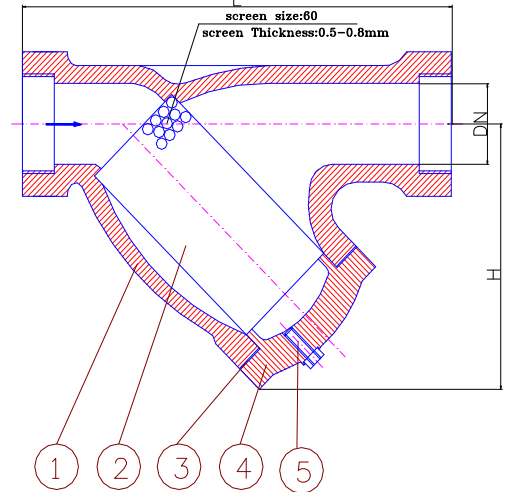

### PARTS AND MATERIAL:

NO	PARTS NAME	MATERIAL
1	BODY	ASTM A126-B/A536,GG25/GGG40
2	SCREEN	ASTM A182 F304
3	GASKET	GRAPHITE OR PTFE
4	BOLT	STELL WITH ZINC/STAINLESS STEEL
5	NUT	STELL WITH ZINC/STAINLESS STEEL
6	COVER	ASTM A126-B/A536,GG25/GGG40
7	DRAIN PLUG	STELL WITH ZINC/STAINLESS STEEL

OTHER MATERIALS ARE AVAILABLE UPON REQUEST

### DIMENSIONS LIST (UNIT:MM):

DN	SIZE	L	H
8	1/4"	3-3/16"	1-31/32"
10	3/8"	3-3/16"	1-31/32"
15	1/2"	3-3/16"	1-31/32"
20	3/4"	3-3/4"	2-11/16"
25	1"	4"	3"
32	1-1/4"	5"	3-7/16"
40	1-1/2"	5-3/4"	3-25/32"
50	2"	7"	4-11/32"
65	2-1/2"	9-1/4"	6-3/32"
80	3"	10"	7-2/5"

✧ We hereby reserve the rights of any alternative dimension that would help to improve our valve's quality and working efficiency.