

SHANGHAI CIPHY INDUSTRY CO.,LTD.

ANSI 200WOG CAST STEEL OR STAINLESS STEEL SWING CHECK VALVE NUT COVER DESIGN

MODEL NO: SCAXTH-SW



SWING CHECK VALVE PRODUCT'S SIZE:

PRESSURE GRADE	FROM	TO
200WOG	1/2"	3"

DESIGN DESCRIPTION:

- * THREADED ENDS,
- * THREADED CAP,
- * INVESTMENT CASTING BODY,
- * MATERIAL: ASTM A351 CF8M/CF8, ASTM A216-WCB
- * THREADED: NPT,BSP,BSPT,DIN259/2999.

WORKING PRESSURE AND TEMPERATURE:

MATERIAL	CELSIUR SCALE	FAHRENHEIT
CARBON STEEL	0°C~180°C	32°F~356°F
STAINLESS STEEL	0°C~180°C	32°F~356°F

GENERAL DESIGN SPECIFICATIONS:

ITEM	200WOG
MANUFACTURE	MANUFACTURE STANDARDS
FACE TO FACE	MANUFACTURE STANDARDS
END THREADED	NPT,BSP,BSPT,DIN259/2999
INSPECTION AND TEST	API 598


TEST PRESSURE TO API 598:

ANSI	SHELL (WATER)	Seat (WATER)
200PSI	2.11Mpa	300PSI 1.55MPa
		220PSI

PARTS AND MATERIAL (ASTM):

NO	PARTS NAME	MATERIAL
1	CAP	A216-WCB/A351-CF8/CF8M/CF3/CF3M
2	GASKET	PTFE
3	DISC	A216-WCB/A351-CF8/CF8M/CF3/CF3M
4	PIN	F6a/F304/F316/F304L/F316L
5	BODY	A216-WCB/A351-CF8/CF8M/CF3/CF3M

OTHER MATERIALS ARE AVAILABLE UPON REQUEST

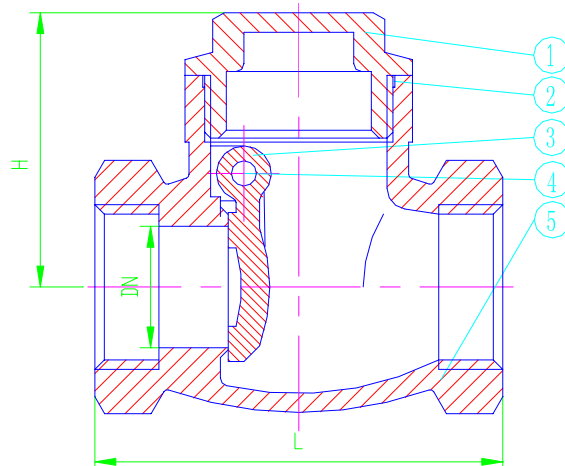

DIMENSIONS LIST(UNIT:MM):

Size	DN	L	H	D
1/4"	DN6	65	85	70
3/8"	DN10	65	85	70
1/2"	DN15	65	85	70
3/4"	DN20	80	95	70
1"	DN25	90	105	80
1-1/4"	DN32	105	125	90
1-1/2"	DN40	120	135	90
2"	DN50	140	155	100

*** We hereby reserve the rights of any alternative dimension that would help to improve our valve's quality and working efficiency**



SHANGHAI CIPHY INDUSTRY CO.,LTD
3F-402,NO.1467 CAOBAO Rd. JINGANXIN TOWN
SHANGHAI, CHINA.
TEL:+86-21-5478 4461
FAX:+86-21-5478 4464
HTTP://WWW.CIPHY.CN
CIPHY@CIPHY.COM
COPYRIGHT©2004-[CIPHY]
ALL RIGHTS RESERVED.