


SHANGHAI CIPHY INDUSTRY CO.,LTD.

Marine Valve JIS F7301/7351/7302/7352

MODEL NO: JIS- F7301/7351/7302/7352

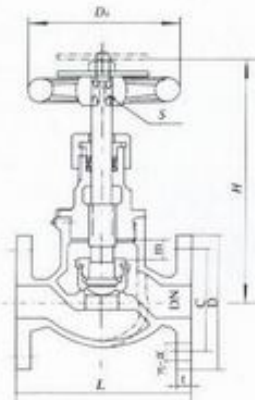


MAIN DATA FOR JOINING(mm)

DN	L	H	Flange dimensions					Hand wheel	
			D	C	t	n	d	Do	S
15	100	130	80	60	9	4	12	80	8
20	110	140	85	65	10	4	12	100	10
25	120	160	95	75	10	4	12	125	10
32	140	170	115	90	12	4	15	125	10
40	160	190	120	95	12	4	15	140	12
50	210	235	130	105	14	4	15	140	12
65	250	260	155	130	14	4	15	160	14

Marine Bronze Globe Valves JIS F7301 5K

Marine Bronze Screw Down Check Globe Valves JIS F73515K

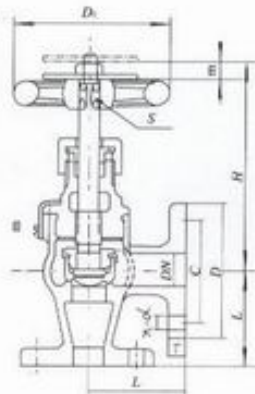

MAIN DATA FOR JOINING(mm)

DN	L	H	Flange dimensions					Hand wheel	
			D	C	t	n	d	Do	S
15	55	120	80	60	9	4	12	80	8
20	60	130	85	65	10	4	12	100	10
25	65	145	95	75	10	4	12	125	10
32	80	150	115	90	12	4	15	125	10
40	85	165	120	95	12	4	15	140	12
50	100	200	130	105	14	4	15	140	12
65	115	220	155	130	14	4	15	160	14

Marine Bronze Angle Valves JIS F7302 5K

Marine Bronze Screw Down Check Angle Valves JIS F7352 5K

Applicable scope:

The products are used for preventing reflux in fuel oil piping, lubricating oil piping and water piping at temperatures 120°C or less. Dimensions of flange are according to JIS B2220 flange dimensions of steel pipe.

Materials of major parts:

Part name	Material	
	Name	Mark
Body, Bonnet	Tin-bronze	ZQSn10-21
Disc, Seat	Albronze	QAL9-21
Packing	PTFE	SFT-2

Capability:

Nominal Pressure	5kgf/cm ² (0.49Mpa)
Seal Pressure	7.7kgf/cm ² (0.761Mpa)
Intensity Pressure	10.5kgf/cm ² (1.046Mpa)

Medium	Max Pressure: kgf/cm ² (Mpa)
Oil & flow water	5 kgf/cm ² (0.49Mpa)
Lenitic water ≤ 120°C	7 kgf/cm ² (0.69Mpa)



SHANGHAI CIPHY INDUSTRY CO.,LTD
 7G-1 Building, N0.515 Yishan Rd.
 Shanghai, China
 TEL:+86-21-5497 5962
 FAX:+86-21-5497 5963
 HTTP://WWW.CIPHY.CN
 CIPHY@CIPHY.COM
 COPYRIGHT©2004-[CIPHY]
 ALL RIGHTS RESERVED.