


SHANGHAI CIPHY INDUSTRY CO.,LTD.

Marine Valve JIS F7303/7409/7304/7410

MODEL NO: JIS-F7303_7409_7304_7410

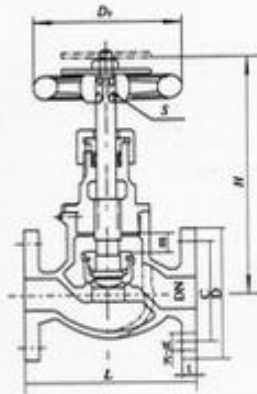


MAIN DATA FOR JOINING(mm)

DN	L	H	Flange dimensions					Hand wheel	
			D	C	t	n	d	Do	S
15	110	130	95	70	12	4	15	80	8
20	120	140	100	75	14	4	15	100	10
25	130	160	125	90	14	4	19	125	10
32	160	170	135	100	16	4	19	125	10
40	180	190	140	105	16	4	19	140	12

Marine Bronze Globe Valves JIS F7303 16K

Marine Bronze Screw Down Check Globe Valves JIS F7409 16K

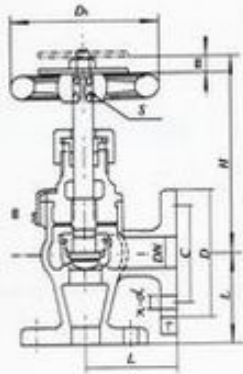

MAIN DATA FOR JOINING(mm)

DN	L	H	Flange dimensions					Hand wheel	
			D	C	t	n	d	Do	S
15	70	120	95	70	12	4	15	80	8
20	75	125	100	75	14	4	15	100	10
25	85	140	125	90	14	4	19	125	10
32	90	145	135	100	16	4	19	125	10
40	100	160	140	105	16	4	19	140	12

Marine Bronze Angle Valves JIS F7304 16K

Marine Bronze Screw Down Check Angle Valves JIS F7410 16K

Applicable scope:

The products are used for preventing refluece in fuel oil piping, lubricating oil piping and water piping at temperatures 120°C or less. Dimensions of flange are according to JIS B2220 flange dimensions of steel pipe.

Materials of major parts:

Part name	Material	
	Name	Mark
Body, Bonnet	Tin-bronze	ZQSn10-21
Disc, Seat	Albronze	QA19-21
Packing	PTFE	SFT-2

Capability:

Nominal Pressure	16kg/cm ² (1.56Mpa)
Seal Pressure	18kg/cm ² (1.76Mpa)
Intensity Pressure	24kg/cm ² (2.38Mpa)

Medium	Max Pressure kg/cm ² (Mpa)
Oil & flow water	16 kg/cm ² (1.57Mpa)
Lenitic water≤120°C	22 kg/cm ² (2.16Mpa)



SHANGHAI CIPHY INDUSTRY CO.,LTD

7G-1 Building, N0.515 Yishan Rd.

Shanghai, China

TEL:+86-21-5497 5962

FAX:+86-21-5497 5963

HTTP://WWW.CIPHY.CN

CIPHY@CIPHY.COM

COPYRIGHT©2004-[CIPHY]

ALL RIGHTS RESERVED.